




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : G06F 13/38</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/58844 (43) International Publication Date: 5 October 2000 (05.10.00)</p>
<p>(21) International Application Number: PCT/EP00/02182 (22) International Filing Date: 13 March 2000 (13.03.00) (30) Priority Data: 199 13 585.1 25 March 1999 (25.03.99) DE (71) Applicant (for all designated States except US): DEUTSCHE THOMSON-BRANDT GMBH [DE/DE]; Hermann-Schwer-Str. 3, D-78048 Villingen-Schwenningen (DE). (72) Inventors; and (75) Inventors/Applicants (for US only): SCHWEIDLER, Siegfried [DE/DE]; Südfeld 10, D-30989 Gehrden (DE). HEIGHWAY, Timothy [GB/GB]; 25 Pytchley St., Northampton, Northamptonshire NN1 5QY (GB). GAEDKE, Klaus [DE/DE]; Schaumannweg 22, D-30659 Hannover (DE). (74) Agent: SCHÄFERJOHANN, Volker, Deutsche Thomson-Brandt GmbH, European Patent Operations, Karl-Wiechert-Allee 74, D-30625 Hannover (DE).</p>	<p>(81) Designated States: AE, AL, AU, BA, BB, BG, BR, CA, CN, CR, CU, CZ, DM, EE, GD, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LU, LV, MA, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, TR, TT, UA, US, UZ, VN, YU, ZA, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: METHOD FOR THE MANAGEMENT OF DATA RECEIVED VIA A DATA BUS, AND APPARATUS FOR CARRYING OUT THE METHOD

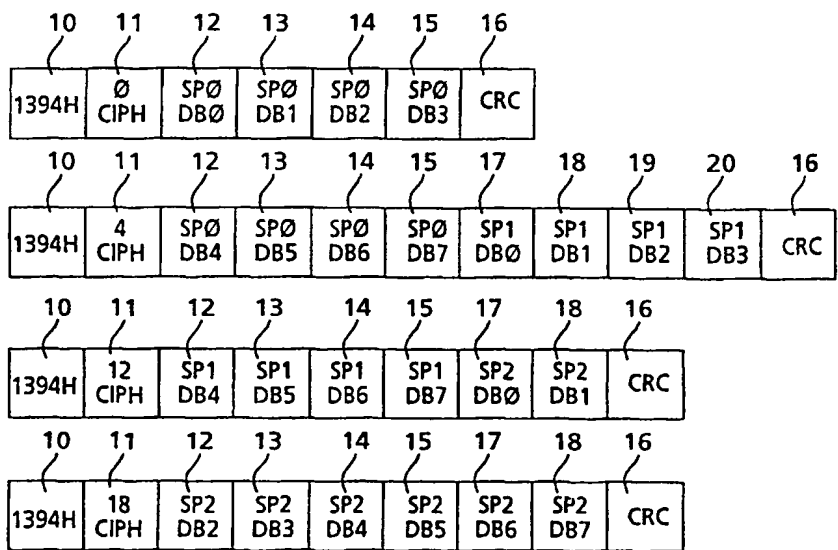

(57) Abstract

The format of the transmission of isochronous data packets via the IEEE 1394 bus is defined in the IEC 61883 Standard. In this case, it is possible to use an operating mode in which the same number of data blocks (DB0-DB7) is always transmitted in a bus packet. In this case, the memory management is extremely simple and the data source packet boundaries can easily be determined. However, the IEC 61883 standard also leaves open the possibility of transmitting a variable number of data blocks (DB0-DB7) in the context of isochronous data transmission with the aid of bus packets. In this case, however, subsequently ascertaining the data source packet boundaries poses a problem. The invention specifies a solution, favourable in terms of outlay, as to how the data source packet boundaries can easily be reconstructed. It is based essentially on modulo-n counting of data blocks (DB0-DB7).